

Parameters

Model	DP2S	DP3S	DP4S	DP5S	DP69S	DP39S	DP4S	DP5S	DP6S	DP7S
Pixel Pitch (mm)	2.84	3.91	4.81	5.95	6.94	3.91	4.81	5.95	6.94	7.81
Pixel Density (dot/m ²)	123904	65536	43264	28224	20736	65536	43264	28224	20736	16384
LED Type	SMD2121	SMD2121	SMD2121	SMD2121	SMD2121	SMD1921	SMD1921 SMD2727	SMD2727	SMD3030	SMD3535
Module Size(mm)	250*500	250*500	250*500	250*500	250*500	250*500	250*500	250*500	250*500	250*500
Horizontal Viewing Angle (Deg)	140	140	140	140	140	140	140	140	140	140
Vertical Viewing Angle (Deg)	140	140	140	140	140	140	140	140	140	140
Brightness (cd/m ²)	1000	1200	1200	1200	1200	2400	2400 4500	4500	4500	4500
Grey Scale(bit)	14-15	14-15	14-15	14-15	14-15	14-15	14-15	14-15	14-15	14-15
Refresh Rate (Hz)	≥1200	≥1200	≥1200	≥1200	≥1200	≥1200	≥1200	≥1200	≥1200	≥1200
Maximum Cabinet Power Consumption (w/sqm)	720	550	550	550	550	720	720	550	550	550
Average Cabinet Power Consumption (w/sqm)	240	180	180	180	180	240	240	180	180	180
Cabinet Size (mm*mm)	L500*H500*T75	L500*H500*T75 L500*H1000*T75	L500*H500*T75 L500*H1000*T75	L500*H500*T75 L500*H1000*T75	L500*H500*T75 L500*H1000*T75	L500*H500*T75	L500*H500*T75	L500*H500*T75 L500*H1000*T75	L500*H500*T75 L500*H1000*T75	L500*H1000*T75
Cabinet Weight (Kg)	8.5	8.5 14.5	8.5 14.5	8.5 14.5	8.5 14.5	9.5	9.5	9.5 15.5	9.5 15.5	15.5
Cabinet Resolution (PX*PX)	176*176	128*128 128*256	104*104 104*208	84*84 84*168	72*72 72*144	128*128	104*104	84*84 84*168	72*72 72*144	64*128
Angle Adjustment (optional)	Optional	Optional	Optional	Optional	Optional	Not Optional	Optional	Optional	Optional	Optional
Input Voltage (V)	110-220V	110-220V	110-220V	110-220V	110-220V	110-220V	110-220V	110-220V	110-220V	110-220V
Waterproof Level	IP30	IP30	IP30	IP30	IP30	IP65	IP65	IP65	IP65	IP65
Working Environment	Indoor					outdoor				



Reference Cases



Film Festival in india



Poland concert



The Air Bus United States
Factory Opening Ceremony

DAZZLE PLUS SERIES
P2.8 /3.9/4.8/5.9/6.9/7.8 Stage Rental Products

Ingenuity Design
Intelligent Design
The King of stage rental


◆ Product photos

High performance
magnetic solution

Ultra-strong structure
High precision mechanism

Aluminum natural
Heat dissipation


Fast lock design
Hot-playing

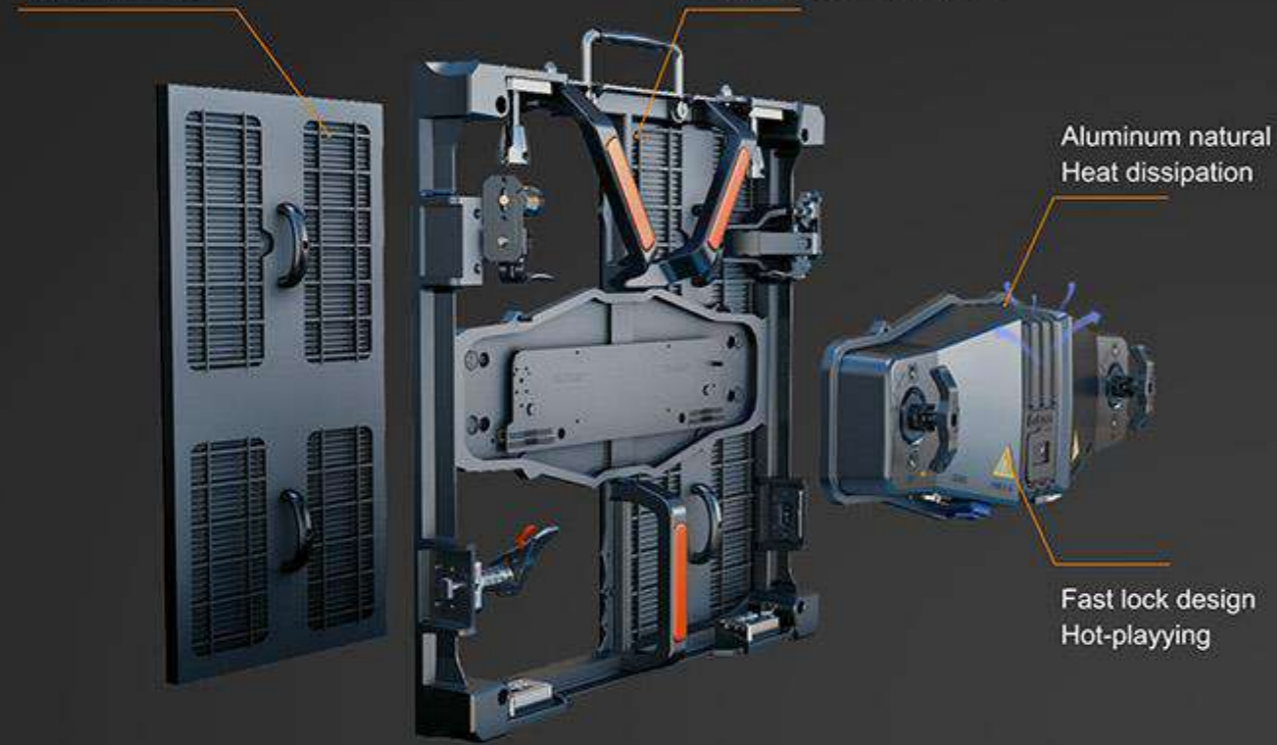

◆ Fast lock design



Fast lock design



Angle adjustment
Quick connection



Separated power box
Fast replacement



Spring lock
Click to lock tight

◆ Mix & Radian to make installation




Mix with 500x1000 cabinet



Convex



Concave

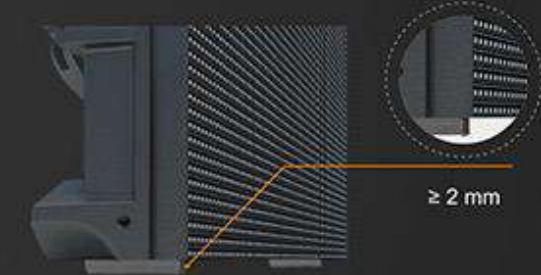


Anticollision design

◆ Landing/Hanging installation



Ground support

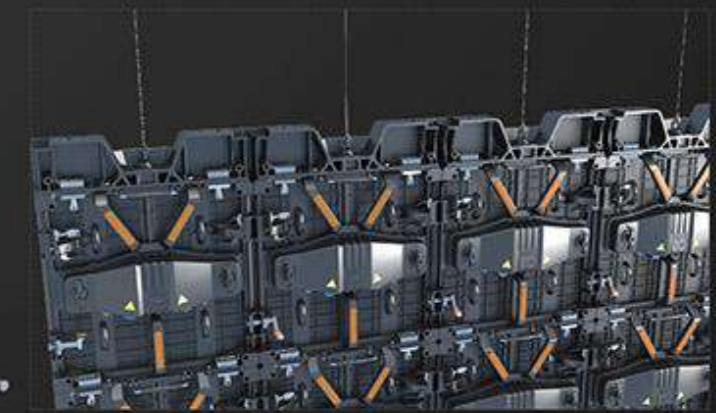

Hanging installation